


MEHANICKI UPRAVLJANI VENTILI/MECHANICALLY ACTUATED VALVES


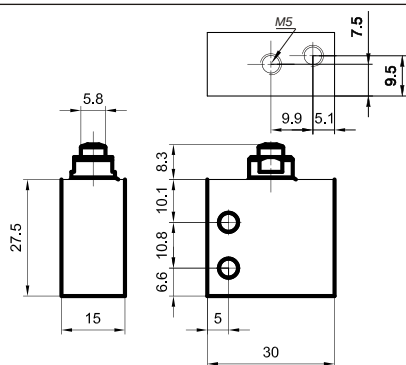


3/2 ventil, normalno zatvoren, aktiviranje s cepom

V-32M5

3/2 Valve, N.C. , Direct Pushrod

Temperatura / Temperature.....max. +60°C
 Pritisak / Pressure.....0 -10 bar
 Protok / Flow (5 bar).....100 l / min
 Navoj / Thread.....M5

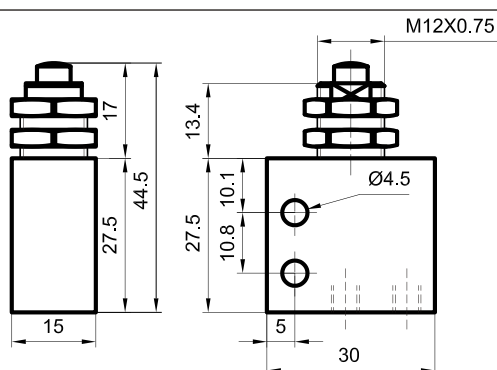



3/2 ventil, normalno zatvoren, aktiviranje s cepom, (ugradni)

VG-32M5

3/2 Valve, N.C. , Direct Pushrod, Build in Option

Temperatura / Temperature.....max. +60°C
 Pritisak / Pressure.....0 -10 bar
 Protok / Flow (5 bar).....100 l / min
 Navoj / Thread.....M5

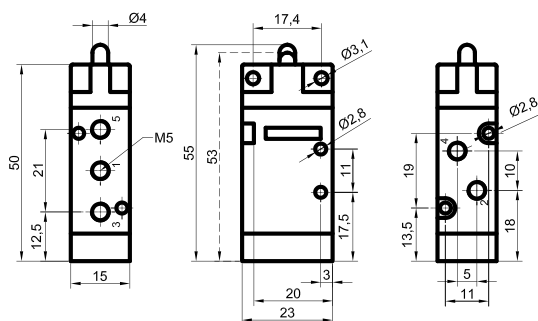


5/2 ventil, aktiviranje s cepom

YV-52M5

5/2 Position Direct Pushrod Operation

Temperatura / Temperature.....max. +60°C
 Pritisak / Pressure.....0 - 8 bar
 Protok / Flow (5 bar).....170 l / min
 Navoj / Thread.....M5

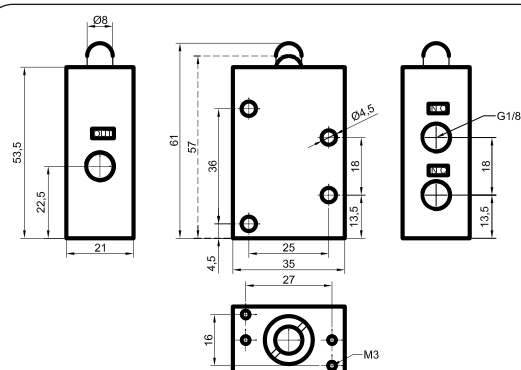


3/2 ventil, aktiviranje s cepom





YV-3218




3/2 Position Direct Pushrod Operation

Temperatura / Temperature.....max. +60°C
 Pritisak / Pressure.....0 - 8 bar
 Protok / Flow (5 bar).....600 l / min
 Navoj / Thread.....G 1/8



YV-3214

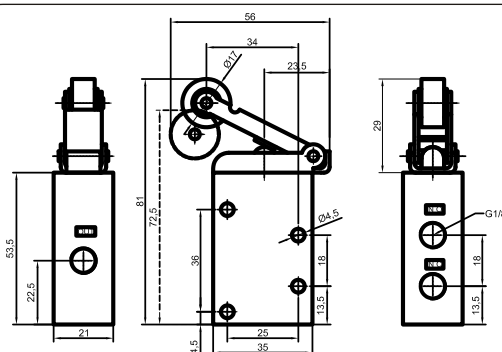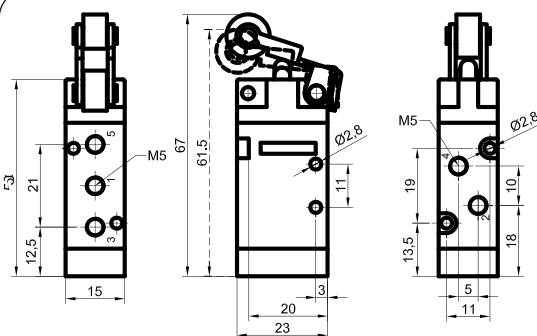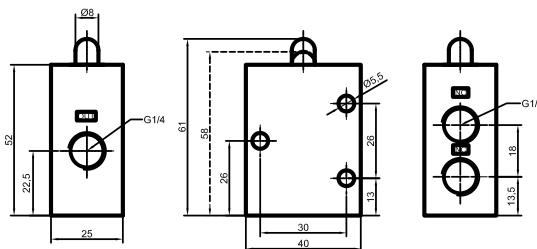

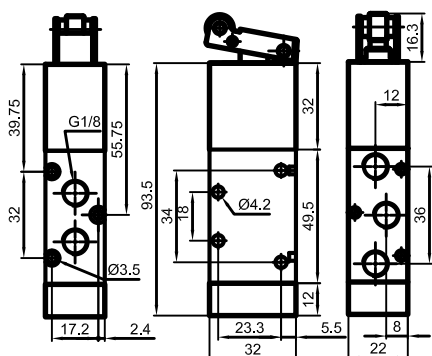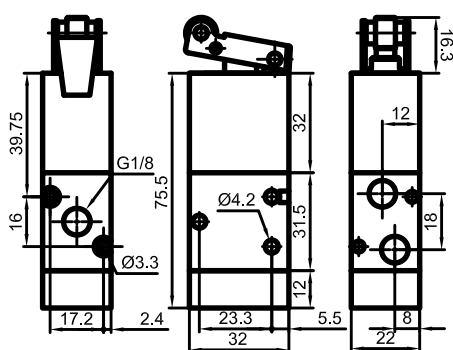[illegible]

MEHANICKI UPRAVLJANI VENTILI/MECHANICALLY ACTUATED VALVES

YL-3218



3/2 ventil, aktiviranje s koljenastim kotacicem



3/2 Position One-way Roller Lever Operation

Temperatura / Temperature.....max. +60°C

Pritisak / Pressure.....0 - 8 bar

Protok / Flow (5 bar).....600 l / min

Navoj / Thread.....G 1/8

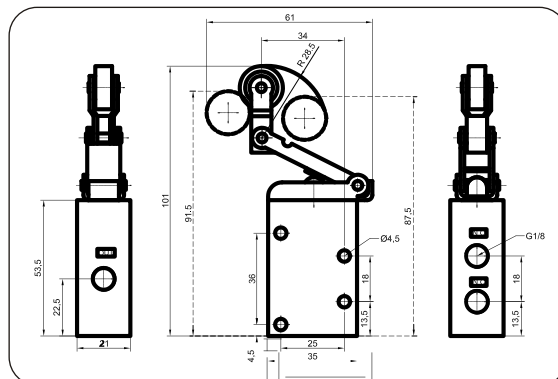

YL-3214



3/2 ventil, aktiviranje s koljenastim kotacicem



3/2 Position One-way Roller Lever Operation

Temperatura / Temperature.....max. +60°C

Pritisak / Pressure.....0 - 8 bar

Protok / Flow (5 bar).....900 l / min

Navoj / Thread.....G 1/4

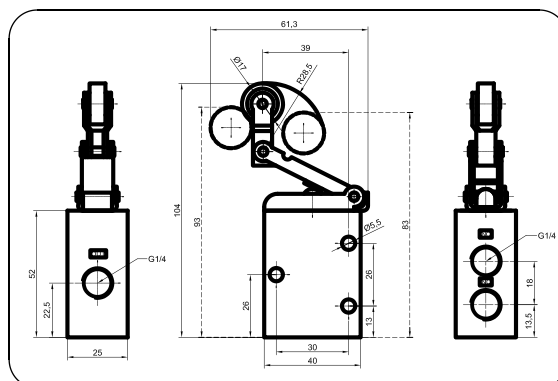

AN-3218 S



3/2 ventil, normalno zatvoren, servo upravljan, aktiviranje s antenom


3/2 Valve, N.C. , Pilot Operation

Temperatura / Temperature.....max. +60°C

Pritisak / Pressure.....1,5 -10 bar

Protok / Flow (5 bar).....550 l / min

Navoj / Thread.....G 1/8

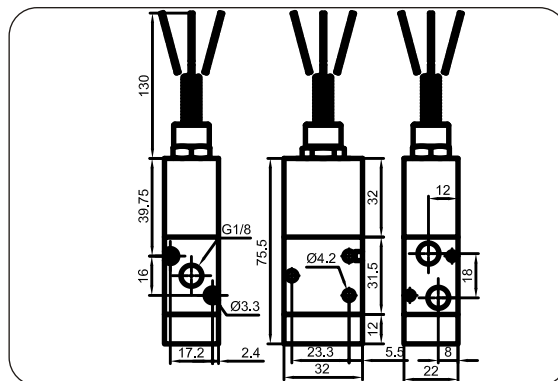

AN-5218 S



5/2 ventil, normalno zatvoren, servo upravljan, aktiviranje s antenom

5/2 Valve, Pilot Operation

Temperatura / Temperature.....max. +60°C

Pritisak / Pressure.....1,5 -10 bar

Protok / Flow (5 bar).....550 l / min

Navoj / Thread.....G 1/8

