


RUCNO UPRAVLJANI VENTILI/ MANUALLY ACTUATED VALVES





3/2 ventil, normalno zatvoren, ručno upravljani,
aktiviranje s rucicom

H-32M5

3/2 Valve, N.C., Hand Lever Operated

Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....0 -10 bar
Protok / Flow (5 bar).....100 l / min
Navoj / Thread.....M5

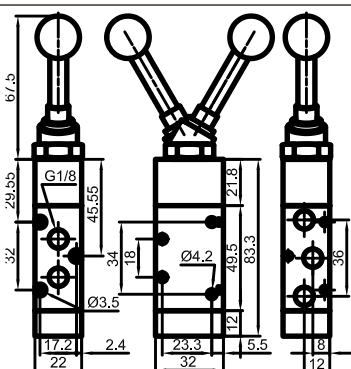


5/2 ventil, ručno upravljani, aktiviranje s
rukcom (ostane u poziciji)

RR-5218

5/2 Valve, Hand Lever Operated,
(Handle stay in position)

Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....0 -10 bar
Protok / Flow (5 bar).....550 l / min
Navoj / Thread.....G 1/8



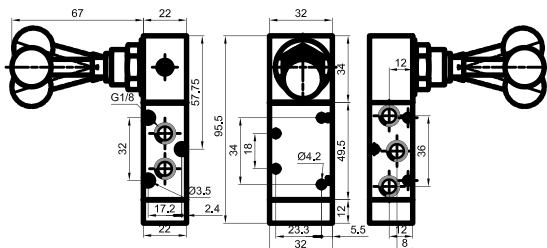


5/2 ventil, ručno upravljani, aktiviranje s
rukcom (ARV-povrat oprugom, ARR -ostane v
poziciji)

ARV-5218
ARR-5218

5/2 Valve, Hand Lever Operated,
(ARV-Spring Return, ARR-stay in position)

Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....0 -10 bar
Protok / Flow (5 bar).....550 l / min
Navoj / Thread.....G 1/8

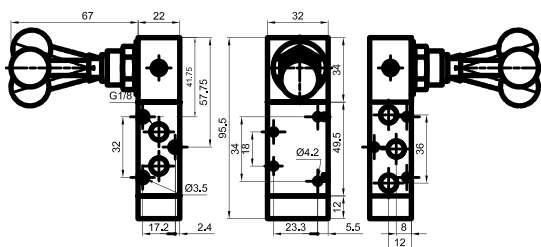


5/3 ventil, ručno upravljani,
aktiviranje s rukcom (povrat oprugom)

ARV-5318-G/E/B

5/3 Valve, Hand Lever Operated,
(Spring Return)

Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....0 -10 bar
Protok / Flow (5 bar).....550 l / min
Navoj / Thread.....G 1/8

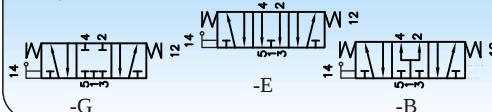

RUCNO UPRAVLJANI VENTILI/ MANUALLY ACTUATED VALVES

ARR-5318-G/E/B



5/3 ventil, ručno upravljani, aktiviranje s rúckom (ostane u poziciji)



5/3 Valve, Hand Lever Operated, (Handle stay in position)

Temperatura / Temperature.....max. +60°C

Pritisak / Pressure.....0 -10 bar

Protok / Flow (5 bar).....550 l / min

Navoj / Thread.....G 1/8

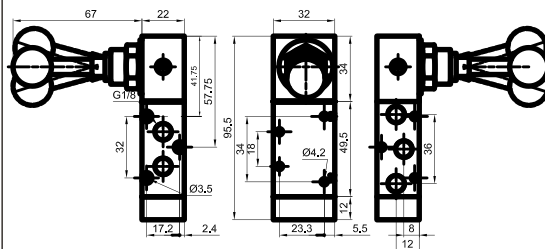

RR-5214



5/2 ventil, ručno upravljani, rúcka ostane u poziciji



5/2 Valve, Hand Lever Operated, (Handle stay in position)

Temperatura / Temperature.....max. +60°C

Pritisak / Pressure.....0 -10 bar

Protok / Flow (5 bar).....1000 l / min

Navoj / Thread.....G 1/4

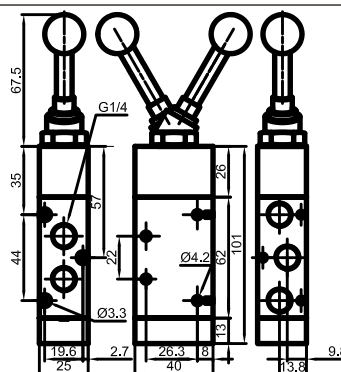ARV-5214
ARR-5214

5/2 ventil, ručno upravljani, aktiviranje s rúckom (ARV-povrat oprugom, ARR-ostane u poziciji)



5/2 Valve, Hand Lever Operated, (ARV-Spring Return, ARR-stay in position)

Temperatura / Temperature.....max. +60°C

Pritisak / Pressure.....0 -10 bar

Protok / Flow (5 bar).....1000 l / min

Navoj / Thread.....G 1/4

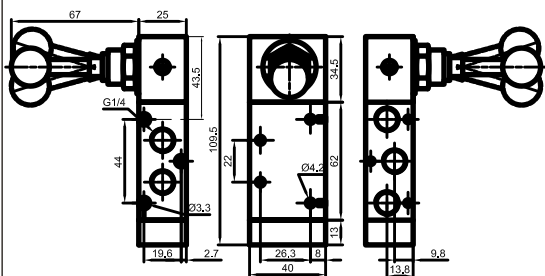

ARV-5314-G/E/B



5/3 ventil, ručno upravljani, aktiviranje s rúckom (povrat oprugom)



5/3 Valve, Hand Lever Operated, (Spring Return)

Temperatura / Temperature.....max. +60°C


Pritisak / Pressure.....0 -10 bar

Protok / Flow (5 bar).....1000 l / min

Navoj / Thread.....G 1/4

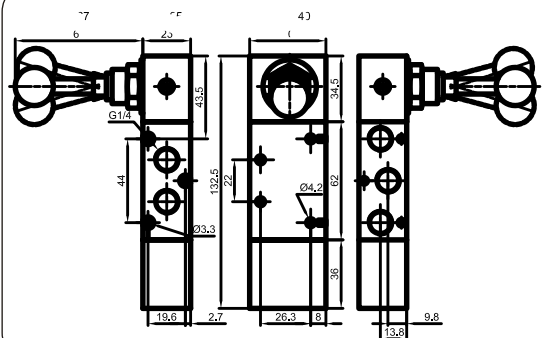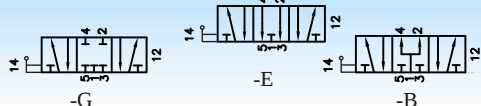

RUCNO UPRAVLJANI VENTILI/ MANUALLY ACTUATED VALVES

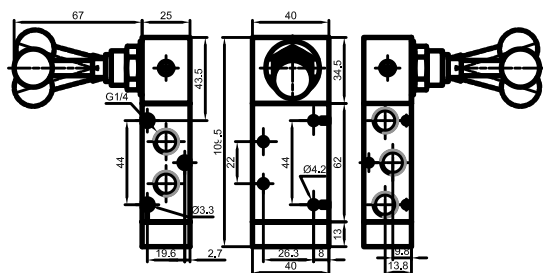


5/3 ventil, ručno upravljani,
aktiviranje s rúckom (ostane u poziciji)

ARR-5314-G/E/B

5/3 Valve, Hand Lever Operated,
(Handle stay in position)

Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....0 -10 bar
Protok / Flow (5 bar).....1000 l / min
Navoj / Thread.....G 1/4

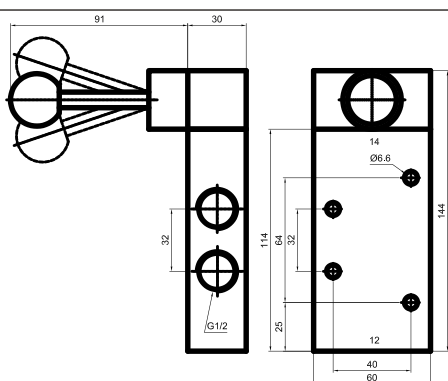


5/2 ventil, ručno upravljani, aktiviranje s
rúckom (ARV-povrat oprugom, ARR -ostane u
poziciji)

ARV-5212
ARR-5212

5/2 Valve, Hand Lever Operated,
(ARV-Spring Return, ARR-stay in position)

Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....0 -10 bar
Protok / Flow (5 bar).....3000 l / min
Navoj / Thread.....G 1/2


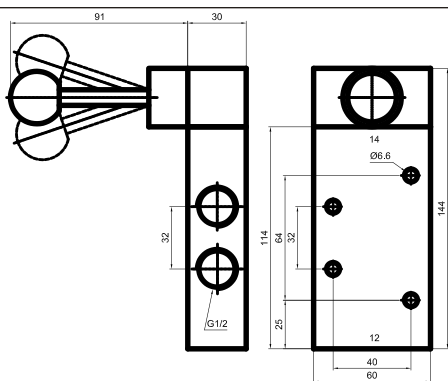


5/3 ventil, ručno upravljani,
aktiviranje s rúckom (povrat oprugom)

ARV-5312-G/E/B

5/3 Valve, Hand Lever Operated,
(Spring Return)

Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....0 -10 bar
Protok / Flow (5 bar).....3000 l / min
Navoj / Thread.....G 1/2

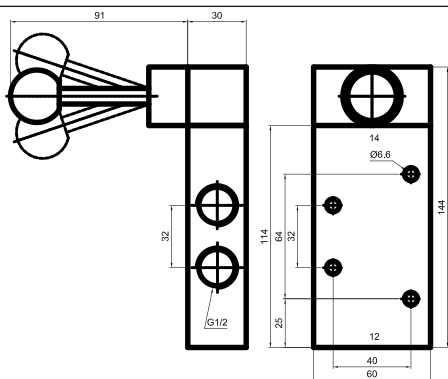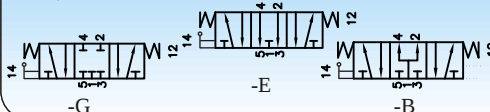


5/3 ventil, ručno upravljani, aktiviranje s
rúckom (ostane u poziciji)

ARR-5312-G/E/B

5/3 Valve, Hand Lever Operated,
(Handle stay in position)

Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....0 -10 bar
Protok / Flow (5 bar).....3000 l / min
Navoj / Thread.....G 1/2

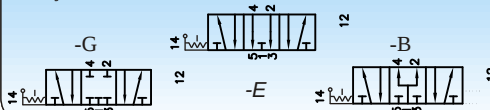

RUCNO UPRAVLJANI VENTILI/ MANUALLY ACTUATED VALVES

YSV-32M5



3/2 ventil, aktiviranje s tipkom
3/2 Position Direct Operation



Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....2 -10 bar
Protok / Flow (5 bar).....170 l / min
Navoj / Thread.....M5



TIPKE STRANA 4.040.0
BUTONSPAGE 4.040.0

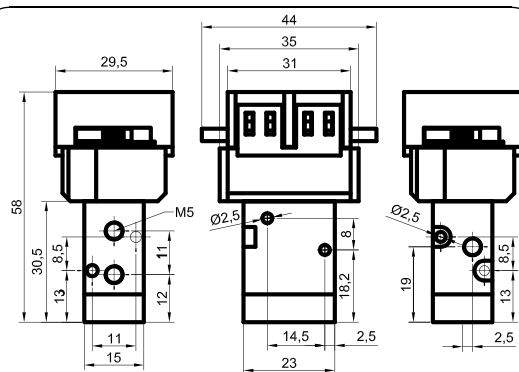

YSV-52M5



5/2 ventil, aktiviranje s tipkom
5/2 Position Direct Operation



Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....2 -10 bar
Protok / Flow (5 bar).....170 l / min
Navoj / Thread.....M5



TIPKE STRANA 4.040.0
BUTONSPAGE 4.040.0

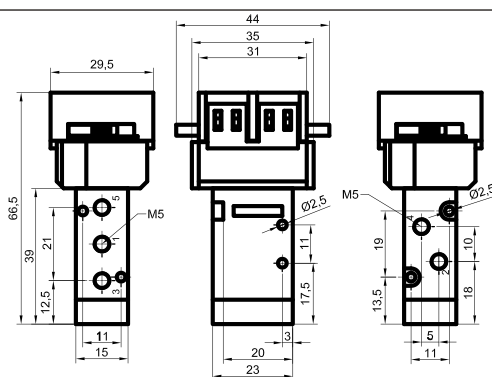

YSV-3218



3/2 ventil, aktiviranje s tipkom
3/2 Position Direct Operation



Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....2 -10 bar
Protok / Flow (5 bar).....700 l / min
Navoj / Thread.....G 1/8



TIPKE STRANA 4.040.0
BUTONSPAGE 4.040.0

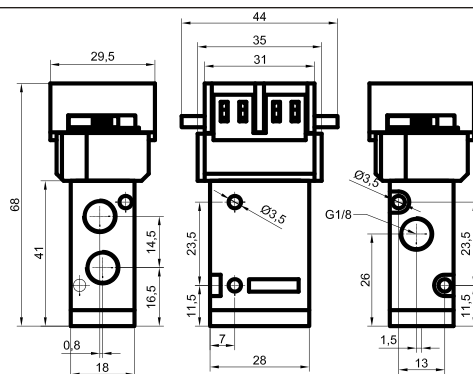

YSV-5218



5/2 ventil, aktiviranje s tipkom
5/2 Position Direct Operation



Temperatura / Temperature.....max. +60°C
Pritisak / Pressure.....2 -10 bar
Protok / Flow (5 bar).....700 l / min
Navoj / Thread.....G 1/8



TIPKE STRANA 4.040.0
BUTONSPAGE 4.040.0

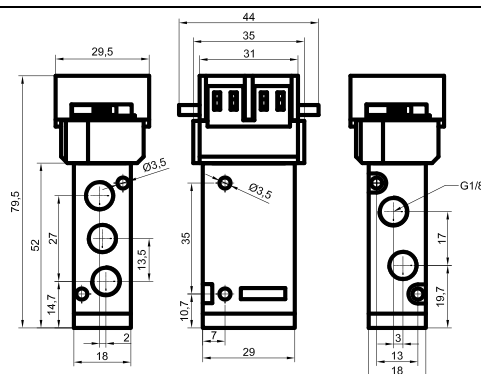

TIPKE, NOŽNO UPRAVLJANI VENTILI/BUTTONS, FOOT OPERATED VALVES

YT-22-B/G/Y/R

Tipka / Push Button

B - crna - black
G - zelena - green
Y - žuta - yellow
R - crvena - red



YP-22

Tipka, gljiva
Dia Spring Return Switch




YPR-22

Tipka, gljiva, zaskocna
Turn to Unlock Switch



YN-22

Preklopnik zaklopni
2-Position Selector Switch

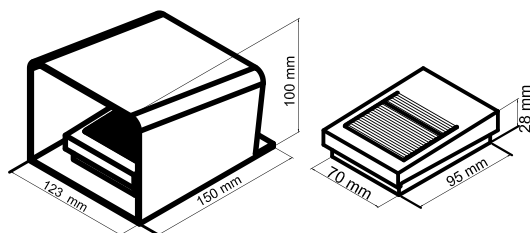

3/2 ventil, nožno upravljani, aktiviranje sa stopalom (povrat oprugom)

3/2 Valve, Foot Treadle Operated,
(Spring Return)

Z- zaštita / Cover Protection

Temperatura / Temperature.....max. +60°C


Pritisak / Pressure.....0 -10 bar

Protok / Flow (5 bar).....100 l / min

Priključak / Connector.....cijev/ tube 4mm



PED-32-4
PED-32-4-Z

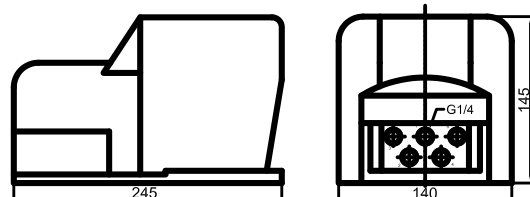

5/2 ventil sa zaštitom, nožno upravljani, aktiviranje sa stopalom


5/2 Valve with Cover Protection, Foot Treadle Operated

Temperatura / Temperature.....max. +60°C

Pritisak / Pressure.....0 -10 bar

Protok / Flow (5 bar).....1200 l / min

Navoj / Thread.....G 1/4



-R

PED-5214
PED-5214-R